



AEC-Q200 Qualified



RoHS
COMPLIANT

**LOW OHM
POWER RESISTORS**

**HSE
SERIES
Size 3920**


- Open frame electron beam welded punched out type.
- Power Rating at 100°C - upto 5W.
- Power Rating at 70°C - upto 12W.
- R0002 to R005.





LOW OHM
POWER
RESISTORS
HSE
SERIES
Size 3920

PHYSICAL CONFIGURATION

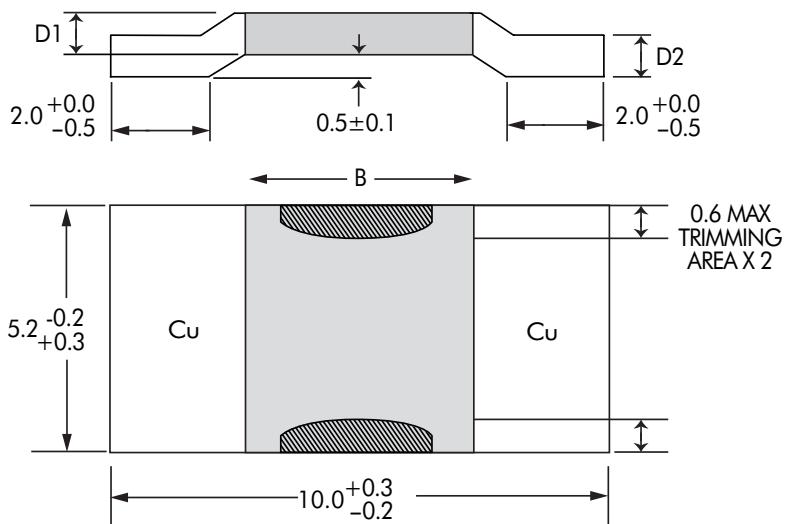

DIMENSIONAL TABLE

SR NO.	HTR TYPE	RESISTANCE VALUE	TOLERANCE	WATTAGE AT 100°C	WATTAGE AT 70°C	B (MM) +0.2/-0.3	D1 (MM) ± 0.10	D2 ± 0.10	INTERNAL HEAT RESISTANCE (R _{thi})	TCR (ppm)	TYPICAL WT. PER PC. (gms)
1	HSE5W R0002	R0002	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	12W	5.0	1.42	1.42	3°K/W	< 200	0.73
2	HSE5W R0003	R0003	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	10W	5.0	1.42	1.42	4.5°K/W	< 150	0.73
3	HSE5W R0005	R0005	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	9W	5.0	0.84	0.84	8°K/W	< 70	0.40
4	HSE5W R0007	R0007	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	8W	5.0	0.60	0.60	11°K/W	< 60	0.29
5	HSE5W R00075	R00075	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	8W	5.0	0.56	0.56	11°K/W	< 60	0.27
6	HSE5W R001	R001	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	5W	8W	5.0	1.36	1.36	9°K/W	< 50	0.64
7	HSE4.5W R0015	R0015	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	4.5W	7W	5.0	0.91	0.91	12°K/W	< 50	0.43
8	HSE4W R001	R001	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	4W	7W	5.0	0.42	0.42	15°K/W	< 50	0.20
9	HSE4W R002	R002	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	4W	6W	5.0	0.68	0.68	16°K/W	< 50	0.31
10	HSE3.5W R0025	R0025	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	3.5W	6W	5.0	0.54	0.54	20°K/W	< 50	0.25
11	HSE3W R0028	R0028	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	3W	5W	5.0	0.47	0.47	21°K/W	< 50	0.21
12	HSE3W R003	R003	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	3W	5W	5.0	0.45	0.45	22°K/W	< 50	0.21
13	HSE2.5W R004	R004	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	2.5W	4W	5.0	0.34	0.34	30°K/W	< 50	0.17
14	HSE2W R005	R005	± 0.25, ± 0.5, ± 1, ± 2, ± 3, ± 5%	2W	3W	5.0	0.27	0.27	50°K/W	< 50	0.15
15	HSE R000	R000		I _{max} =160A		1mm copper					0.60

APPLICATIONS

- Accurate current sensing for power hybrid applications.
- Automotive applications that require high current capability.
- Frequency convertors.
- Power modules.

FEATURES

- Capable of carrying current upto 160amp (R0002) on continuous basis.
- Sturdy copper connectors.
- Excellent long term stability.



LOW OHM
POWER
RESISTORS
HSE
SERIES
Size 3920

ELECTRICAL AND ENVIRONMENTAL CHARACTERISTICS


PARAMETER / PERFORMANCE TEST & TEST METHOD	PERFORMANCE REQUIREMENTS
Power Rating	For FeCrAl - Full power dissipation at 70° C and linearly derated to zero at +170° C. For Manganin (< 0.5% Improved Stability) - Full power dissipation at 100° C & linearly derated to zero at +140° C. For Manganin (< 1% Stability) - Full power dissipation at 130° C and linearly derated to zero at +170° C.
Inductance	< 3nH
Temperature Range	- 65° C to +170° C (Suitably derated as per derating curve provided)
Voltage Rating / Limiting Voltage / Max. Working Voltage (Subject to max. Terminal Temperature of 130° C)	$\sqrt{P \times R}$
Low Temperature Storage and Operation [-65° C for 250 h]	$\Delta R \pm 0.1\%$ - Average
Temperature Coefficient of Resistance (Ambient Temperature Range 20° C - 60° C)	From 50 ppm / K (Depending on Resistance Value)
Temperature Cycling -2000 cycles (-55° C to 150° C)	$\Delta R \pm 0.5\%$ - Average
Life Test / Operational Life - 2000 h rated power with Temperature limitation on Terminal kept at 130° C	$\Delta R \pm 1\%$ - Average
Moisture Resistance [MIL-STD-202 method106]	$\Delta R \pm 0.1\%$ - Average
Mechanical Shock [100 g. 6 ms half sine]	$\Delta R \pm 0.2\%$ - Typical
Vibration, High Frequency [20 g. 10-2000 Hz]	$\Delta R \pm 0.2\%$ - Typical
Bias Humidity [+85° C, 85% RH, 1000h]	$\Delta R \pm 0.5\%$ - Typical
Resistance to Soldering Heat	260°C for 10 sec / 8h steam aging
High Temperature Exposure – 2000h / 170°C	$\Delta R \pm 1\%$ - Average (In covered condition)

RECOMMENDED SOLDER PROFILE


Reflow and IR soldering			
Temperature (°C)	260	255	217
Time (Sec)	Peak	40	90

RECOMMENDED PCB - LAYOUT

Recommended PCB layout for high precision applications

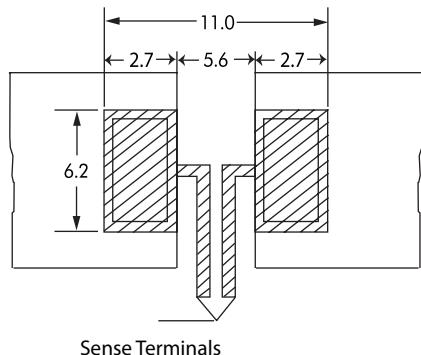


Recommended PCB layout for normal application






LOW OHM
POWER
RESISTORS
HSE
SERIES
Size 3920

TYPICAL POWER DERATING CURVE FOR RESISTOR WHEN FULL POWER IS AT 100°C & 130°C

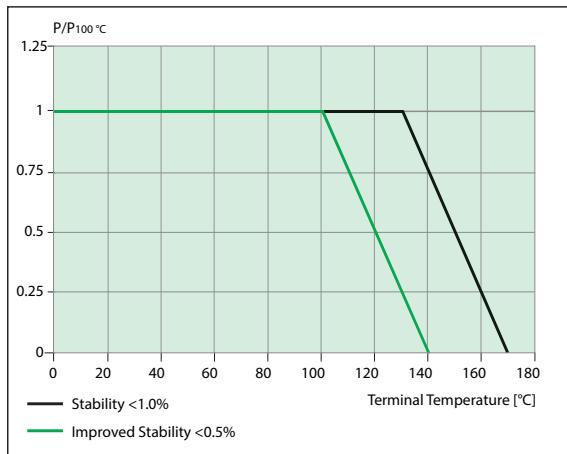


TYPICAL POWER DERATING CURVE FOR RESISTOR WHEN FULL POWER IS AT 70°C

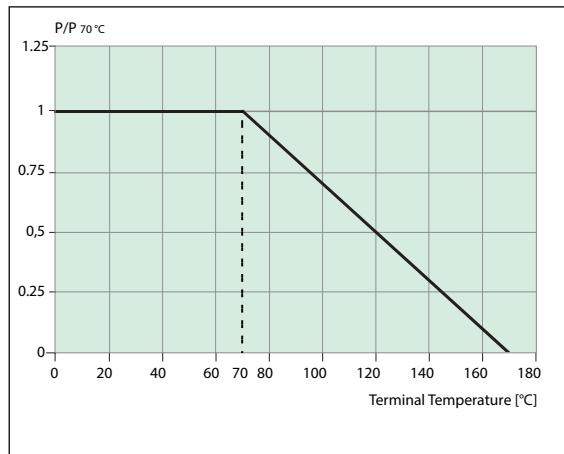



In case the Design Engineer requires a specific graph of a particular component it can be supplied on request.

MAXIMUM PULSE ENERGY WITH RESPECT TO PULSE POWER FOR PERMANENT OPERATION

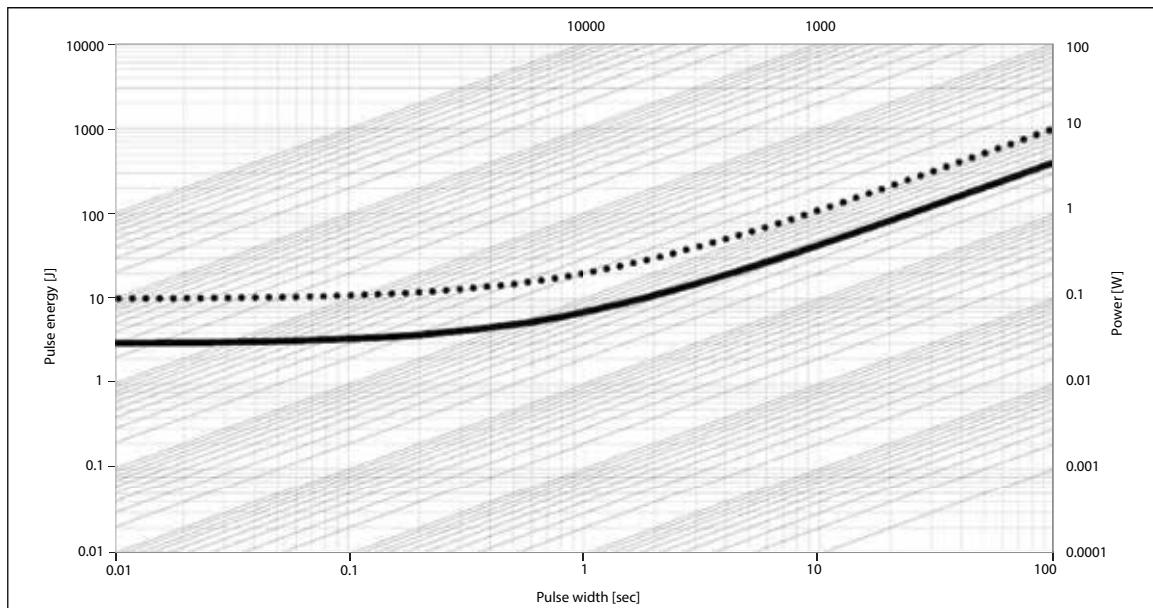

In this graph the max. & min. curve are shown as \dots and $_$ for all resistance values, the area between the max. & min. curve is applicable.
In case the Design Engineer requires a specific graph of a particular component it can be supplied on request.

TYPICAL TEMPERATURE DEPENDANCE OF THE ELECTRICAL RESISTANCE

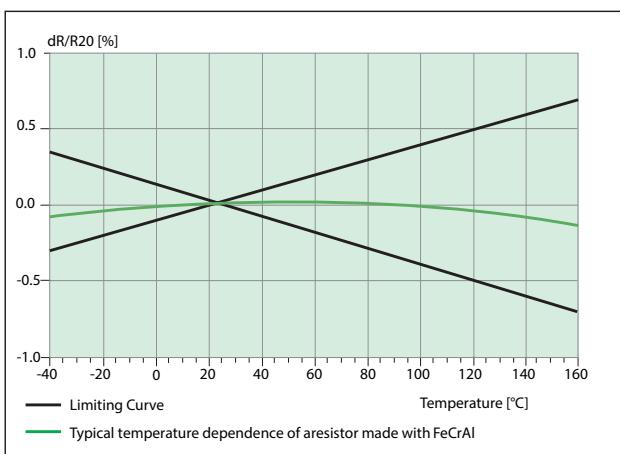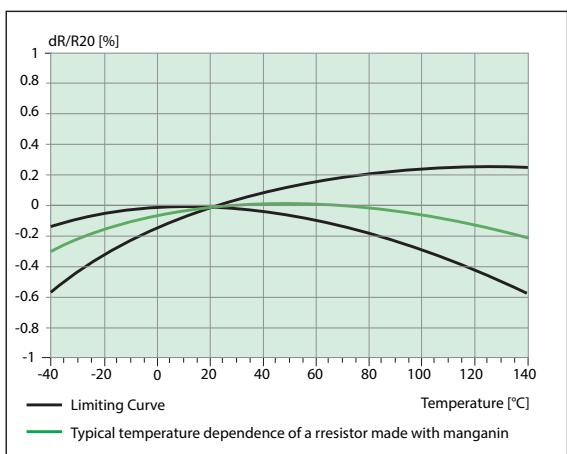




LOW OHM
POWER
RESISTORS
HSE
SERIES
Size 3920

PACKAGING

A. BULK

Resistors shall be packed in plastic Box-K44 of approximate size 162x104x37mm- 2000pcs/box & this box will be vacuum sealed with polythene of 100 micron. With enclose silica gel.

B. TAPE & REEL PACKING

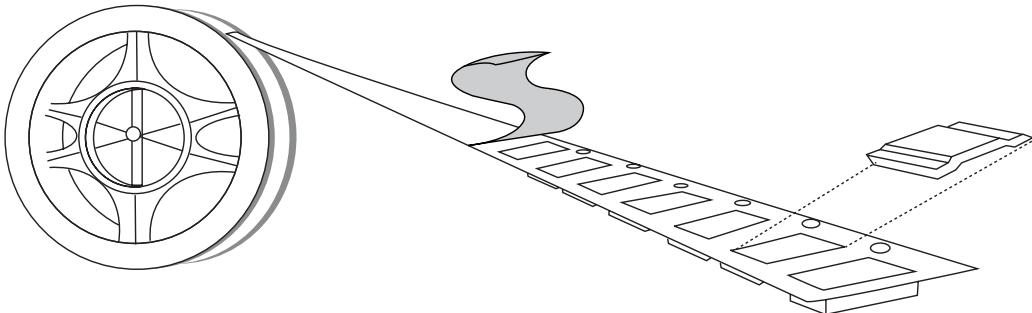

SPECIFICATION	TAPEWIDTH	PARTS PER REEL
EIA-481-D	16mm	3000 pcs

STORAGE CONDITION

Shelf Life (packed) : Temp 25°C to 35°C, Humidity 30 to 80% RH, Shelf life-12 months

Floor Life (unpacked) : Temp 25°C to 35°C, Humidity 30 to 80% RH, Floor life-15 days

ORDERING INFORMATION

SERIES	HTR PART NO.	TYPE	RESISTANCE VALUE	TOLERANCE	MARKING ON RESISTOR
HSE	HSE5W	Tape & Reel – HSE5WTR	R0002	± 1%	HTR HSE R0002 1% DATE CODE
HSE	HSE4.5W	Bulk - HSE4.5W	R0015	± 0.5%	HTR HSE R0015 0.5% DATE CODE
HSE	HSE3W	Tape & Reel – HSE3WTR	R003	± 5%	HTR HSE R0015 5% DATE CODE

Part no of HSE5W, Tape and reel with resistance value R0002 and 1% tolerance, will be **HSE5WTR R0002 ±1%**

Part no of HSE4.5W, Bulk with resistance value R0015 and 0.5% tolerance, will be **HSE4.5W R0015 ±0.5%**

Part no of HSE3W, Tape and reel with resistance value R003 and 5% tolerance, will be **HSE3WTR R003 ±5%**